

# NATIONAL BUREAU OF STANDARDS REPORT

8358

The Effective Intensity of Flashing 399PAR Lamps

By  
Robert T. Vaughan



U.S. DEPARTMENT OF COMMERCE  
NATIONAL BUREAU OF STANDARDS

## THE NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards is a principal focal point in the Federal Government for assuring maximum application of the physical and engineering sciences to the advancement of technology in industry and commerce. Its responsibilities include development and maintenance of the national standards of measurement, and the provisions of means for making measurements consistent with those standards; determination of physical constants and properties of materials; development of methods for testing materials, mechanisms, and structures, and making such tests as may be necessary, particularly for government agencies; cooperation in the establishment of standard practices for incorporation in codes and specifications; advisory service to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; assistance to industry, business, and consumers in the development and acceptance of commercial standards and simplified trade practice recommendations; administration of programs in cooperation with United States business groups and standards organizations for the development of international standards of practice; and maintenance of a clearinghouse for the collection and dissemination of scientific, technical, and engineering information. The scope of the Bureau's activities is suggested in the following listing of its four Institutes and their organizational units.

**Institute for Basic Standards.** Electricity. Metrology. Heat. Radiation Physics. Mechanics. Applied Mathematics. Atomic Physics. Physical Chemistry. Laboratory Astrophysics.\* Radio Standards Laboratory: Radio Standards Physics; Radio Standards Engineering.\*\* Office of Standard Reference Data.

**Institute for Materials Research.** Analytical Chemistry. Polymers. Metallurgy. Inorganic Materials. Reactor Radiations. Cryogenics.\*\* Office of Standard Reference Materials.

**Central Radio Propagation Laboratory.\*\*** Ionosphere Research and Propagation. Troposphere and Space Telecommunications. Radio Systems. Upper Atmosphere and Space Physics.

**Institute for Applied Technology.** Textiles and Apparel Technology Center. Building Research. Industrial Equipment. Information Technology. Performance Test Development. Instrumentation. Transport Systems. Office of Technical Services. Office of Weights and Measures. Office of Engineering Standards. Office of Industrial Services.

---

\* NBS Group, Joint Institute for Laboratory Astrophysics at the University of Colorado.

\*\* Located at Boulder, Colorado.

# NATIONAL BUREAU OF STANDARDS REPORT

NBS PROJECT

NBS REPORT

0201-20-02411

June 1964

8358

The Effective Intensity of Flashing .399PAR Lamps

By  
Robert T. Vaughan  
Photometry and Colorimetry Section  
Metrology Division

Prepared for

Ship Aeronautics Division  
Bureau of Naval Weapons  
Department of the Navy  
Washington, D.C.

## IMPORTANT NOTICE

NATIONAL BUREAU OF STANDARDS  
for use within the Government. It  
and review. For this reason, the  
whole or in part, is not authorized  
Bureau of Standards, Washington  
the Report has been specifically

Approved for public release by the  
director of the National Institute of  
Standards and Technology (NIST)  
on October 9, 2015

Accounting documents intended  
subjected to additional evaluation  
listing of this Report, either in  
Office of the Director, National  
the Government agency for which  
copies for its own use.



U.S. DEPARTMENT OF COMMERCE  
NATIONAL BUREAU OF STANDARDS



## Foreword

Frequently the assumption is made that the intensity-time curve of an incandescent lamp which is flashed by switching power to the lamp is a square-wave. Effective intensities are then computed on this basis. Although this assumption is usually satisfactory for low-current (less than about 0.2 ampere) lamps, it is not satisfactory for the flashing lamps which are used in aviation ground-lighting service especially when these lamps are operated at voltages considerably below rated voltage. An example of this type service is the use of type 399PAR lamps (399-watt, 115-volt) for the "wave-off" and "cut" lights of optical landing systems.

The effective intensity of this lamp as a function of lamp voltage at a specified flash rate and duty cycle was needed for design purposes.

One approach to the problem is the computation of effective intensity as a function of voltage from instantaneous intensity-time curves obtained with the lamp operating at the specified flash rate and duty cycle. This method is relatively simple. However, if subsequently the effective intensity at a different flash rate and duty cycle is required, the entire photometric procedure would have to be repeated.

A second approach is the obtaining of instantaneous intensity-time curves for flashes which are so long that the lamp reaches its steady-state intensity during the flash. The effective intensity for any flash rate and duty cycle can be obtained from such curves by a suitable computational procedure.

The second approach was used in this study as it is probable that effective intensity data for this, or similar, lamps at other flash rates and duty cycles will be required in the future. Since the method may be useful in other applications, it is reported in detail in this report.



## The Effective Intensity of Flashing 399PAR lamps

### ABSTRACT

This report presents the results of a study of the intensity vs time, and of the effective intensity of flashing 399PAR lamps. These lamps are the type used as the wave-off lights in the optical landing system. The study includes the characteristics of the white light, as well as the beam transmitted through aviation-red and aviation-green filters, at the voltages applied to the datum lights on the seven steps of the optical landing system: 21, 27, 35, 44, 60, 80, and 115 volts.

### 1. MATERIAL TESTED

The lamp tested is a type 399PAR Airport-Approach lamp. It is a PAR-56, 399-watt, 115-volt lamp with a CC-13 filament, rated at an initial maximum intensity of approximately 30,000 candelas and a life of 100 hours.

Tests were made on one lamp only, since the relative intensities, not the intensity distributions, were under study.

### 2. TEST PROCEDURE

#### 2.1 Measurements.

A circuit was assembled whereby the voltage applied to the lamp was adjustable by means of a variable autotransformer, and the duration of the "on" interval was continuously adjustable by means of a variable-speed motor driving a cam which applied the energizing voltage to the lamp through a snap-action switch. An oscilloscope provided a graphical presentation of the instantaneous intensity vs time curve.

Lamp voltages of 21, 27, 35, 44, 60, 80, and 115 volts (corresponding to the voltage steps of the shore-based optical landing system datum-light voltages) were applied for the white, red, and the green beams. In each of the 21 presentations, the "on" period was made long enough so that the peak instantaneous intensity of the flash became equal to the intensity of the steadily burning lamp at that applied voltage. The "on" period was further adjusted so that the known time-base scale of the flash could be later conveniently transferred to rectilinear-coordinate graph paper. The peak amplitude of the curve was then measured electronically. Photographic transparencies were recorded with an oscilloscope-record camera of the oscillograms of each of the 21 conditions.





## 2.2 Preparation of Graphs.

Each photographic transparency was mounted in a photographic enlarger, and the image was projected on a sheet of rectilinear-coordinate graph paper. The magnification was adjusted so that each integral second on the time-base scale of the image coincided with a major division on the time-base scale of the rectilinear graph paper. The images were then hand-traced on separate sheets of graph paper.

In order to show more clearly the relationship among the instantaneous intensity-time curves for each of the three colors at a given voltage, the curves on the rectilinear graphs were replotted on semi-log graph paper. The maximum of the white flash at 115 volts was taken as 100 on the relative intensity scale and was so plotted on the semi-log graph paper. All of the 21 curves were replotted on semi-log paper, and all of the curves are shown as relative to the white, 115-volt curve taken as 100.

## 3. COMPUTATION OF THE RELATIVE INTENSITIES

The procedure used for the computation of the effective intensity of flashing lights has been discussed in detail previously. <sup>(1)</sup>

Using the curves of instantaneous relative intensity vs time, shown in figures 1 to 7 of this report, the effective intensity of a flash of any duration for a 399PAR lamp may be computed using a slight modification of the method outlined in the paper referenced above.

A brief explanation of the method of computing the effective intensity at the selected flash rate (1/3 second on, 1/3 second off) follows. For clarity, the curve for a single flash of "clear" (white) light at 60 volts, figure 5, has been reproduced and shown in figure 8.

It is to be noted that on the first flash, the point "x" is not at the time  $t = 0$ , due to the thermal inertia of the filament. The intensity of the light increases from x to y, the steady state. The steady state exists from y to c (the distance between y and c can be extended indefinitely). At point c the energizing voltage is removed, and the intensity falls off linearly from c to z.

After several flashes, equilibrium is reached, and the intensity of each flash then is initiated at some point above x on the curve, since the filament no longer cools off to the ambient temperature (below z).

The intensity will rise during the time the lamp is on, in this example 1/3 second, to the point b. At this time the lamp is turned off and the intensity falls along the cooling curve for 1/3 second falling from the point b' to a'. The intensity-time curve is therefore the composite of a b and b'a', or a b a" as shown on the figure.



The problem is to find an intensity  $a$  such that the time to rise to a point  $b$  along the heating curve is equal to the ON time and the time to fall from  $b$  to  $a$  along the cooling curve is equal to the OFF time. In this particular case both times are equal to  $1/3$  second.

This can be accomplished in the following manner.

1. Start at  $c$  and measure over  $1/3$  second to  $d$ .
2. Drop a vertical from  $d$  intersecting the curve at  $e$ .
3. Form triangle  $c'd'e'$  with  $d'c'$  equal to  $cd$  and  $d'e'$  equal to  $de$  (shown in insert).
4. Slide this triangle along the rising part of the intensity-time curve, keeping  $d'e'$  vertical, until vertices  $c'$  and  $e'$  just touch the curve, at  $a$  and  $b$ .
5. The intensity  $a$  is the initial and terminal intensity and  $b$ , or  $b'$ , is the maximum intensity of a repetitive flash with a duration of  $2/3$  second and a 50% duty cycle.

Note: This procedure is applicable only when the decay curve approximates a straight line. Only when the intensity scale is logarithmic, will the decay curve be a straight line.

There then remains the computation of the effective intensity of the flash  $a$   $b$   $a$ .

As discussed in reference 1 the effective intensity is defined by the equation

$$I_e = \int_{t_1}^{t_2} \frac{I dt}{.2 + (t_2 - t_1)}$$

where  $I_e$  is the effective intensity,  $I$  is the instantaneous intensity and  $t_1$  and  $t_2$  are the limits of the integral where the limits  $t_1$  and  $t_2$  are chosen so that  $I_e$  is a maximum. It has been shown that  $I_e$  is a maximum when the limits  $t_1$  and  $t_2$  are the times when the instantaneous intensity,  $I$ , is equal to the effective intensity,  $I_e$ .



The computation of the effective intensity is then reduced to selecting a  $t_1$  and  $t_2$  so  $I_e = I$  at  $t_1$  and  $t_2$ . Since this curve is plotted on semi-log paper, the area under the curve cannot be integrated with a planimeter. Instead,  $I_e$  may be calculated from the expression

$$I_e = \frac{\Sigma I_{av} \Delta t}{.2 + (t_2 - t_1)}$$

where  $I_e$  is the effective intensity, and

$I_{av}$  is the average instantaneous intensity during a small  $\Delta t$ , where  $\Delta t$  is small when compared with  $(t_2 - t_1)$ , the limits of the summation.

For simplicity,  $\Delta t$  in this case was taken as .05 sec or less, and  $I_{av}$  was taken as the  $I$  at the midpoint of the interval  $\Delta t$ .

This method is illustrated below, showing the computation of the effective intensity for the curve shown in figure 8.

It is convenient to separate the composite curve for the flash into two parts: the rising part, and the falling part. There will, therefore, be an initial  $t$  and a final  $t$  for each of the two parts. These will be called  $t_a$  and  $t_b$ , respectively, for the rising part, and  $t_c$  and  $t_d$ , respectively, for the falling part, with  $t_a$  corresponding to  $t_1$  and  $t_d$  corresponding to  $t_2$  of the integral.

Therefore  $(t_2 - t_1) = (t_b - t_a) + (t_d - t_c)$ .

An estimated  $I_e$  is chosen at 4.0. Then on the rising portion of the curve (with  $\Delta t$  taken as .05):

at 4.0,	$t_a = .30$ ,	$t_b = .45$ ,	$(t_b - t_a) = .15$
at $t =$	.30	.35	.40
$I =$	4.0	5.9	7.8
$I_{av} =$	4.95	6.75	8.4
$I_{av}\Delta t =$	$(4.95 + 6.75 + 8.4)(.05) = 1.005$		

and on the falling portion of the curve (with  $\Delta t$  taken as  $[t_d - t_c]$  since the curve is linear):

at 4.0,	$t_c = .03$ ,	$t_d = .11$ ,	$(t_d - t_c) = .08$
at $t =$	.03	.11	
$I =$	9.0	4.0	
$I_{av} =$	6.5		
$I_{av}\Delta t =$	$(6.5)(.08) = .520$		



$$\Sigma I_{av}\Delta t = 1.005 + .520 = 1.525$$

$$(t_2 - t_1) = (t_b - t_a) + (t_d - t_c) = .15 + .08 = .23$$

$$I_e = \frac{\Sigma I_{av}\Delta t}{.2 + (t_2 - t_1)} = \frac{1.525}{.43} = 3.55$$

The computed  $I_e$  is lower than the estimated  $I_e$ , so the actual  $I_e$  lies somewhere between the two but nearer 3.55.

The next estimated  $I_e$  is chosen at 3.6.

Following the above procedure, the computed  $I_e = 3.62$ . This calculated  $I_e$  is close enough to the second estimated  $I_e$  to estimate that the actual effective intensity is 3.6.

Note: When the integration is made from a rectilinear plot with a planimeter, the usual procedure for the second step is to use the  $I_e$  obtained in step 1 as the estimated value of  $I_e$  for the computations of the second step. However, with the numerical summation used here, it is often more convenient to choose a round number near the  $I_e$  obtained in the first step. Since the value of  $I_e$  changes very slowly with estimated values of  $I_e$  near the "true"  $I_e$ , this procedure is satisfactory.

#### 4. RESULTS

The instantaneous intensity-time characteristics for the seven voltages and three colors are shown in figures 1 to 7. Figure 8 shows the method of computing the effective intensity as described in paragraph 3 of this report. This curve is the same as the curve for white light on figure 5.

Figure 9 is a comparison of the relative intensity-voltage characteristics of a steady-burning 399PAR lamp (as reported in NBS Report 6190), the effective relative intensity-voltage characteristics of a flashing 399PAR lamp operating under the conditions shown, and the effective relative intensity-voltage characteristics of the flashing 399PAR lamp operating 12 volts above the datum-light voltage, as they are used as wave-off lights in the shore-based optical landing system. Note that this curve is plotted against the applied datum-light voltage.







Table I lists the effective intensities relative to the intensity of a steady-burning 399PAR lamp operating at 115 volts taken as 100. The effective intensities shown in this table are for a single, or the initial, flash and for the flash at equilibrium conditions for a flash rate of 90 flashes per minute with a 1/3 second "ON" period and a 1/3 second "OFF" period. This is the flash rate of the wave-off lights of the optical landing system which uses 399PAR lamps for this purpose.

TABLE I. EFFECTIVE INTENSITY OF FLASHING 399PAR LAMPS  
RELATIVE TO STEADY BURNING "WHITE" LAMPS AT 115 VOLTS TAKEN AS 100

Flash Rate: 90 Flashes per Minute Cycle: 1/3 Sec. "ON", 1/3 Sec. "OFF"				
Lamp Voltage	Color of Light	Relative Intensity		
		Nominal Steady Burning Condition	Single Flash	Flashing at Stable Condition
Volts		%	%	%
21	White	.10	-	.0080
	Red		-	.0039
	Green		-	.0030
27	White	.33	.0014	.042
	Red		-	.011
	Green		-	.0062
35	White	1.0	.025	.214
	Red		-	.084
	Green		-	.056
44	White	3.3	.19	.61
	Red		.051	.24
	Green		.025	.11
60	White	10	1.9	3.6
	Red		.53	.96
	Green		.40	.85
80	White	33	8.7	12.6
	Red		2.1	3.1
	Green		1.9	2.7
115	White	100	39	44.8
	Red		7.5	9.6
	Green		8.4	10.6



## 5. DISCUSSION

The method of computing the effective intensity of a flashing 399PAR lamp outlined in the preceding paragraph, paragraph 4, may be used for any flash rate for these lamps at any voltage for which the instantaneous intensity-time curve is known.

This method may, with sufficient accuracy for engineering estimates, be used for other lamps with approximately the same current rating.

## REFERENCES

- 1 Charles A. Douglas, Computation of the Effective Intensity of Flashing Lights, Ill. Eng. 52, 641, 1957.

NBS Report 8358  
June 1964

US COMM NBS DC



(Steady-burning intensity at 115 volts = 100)

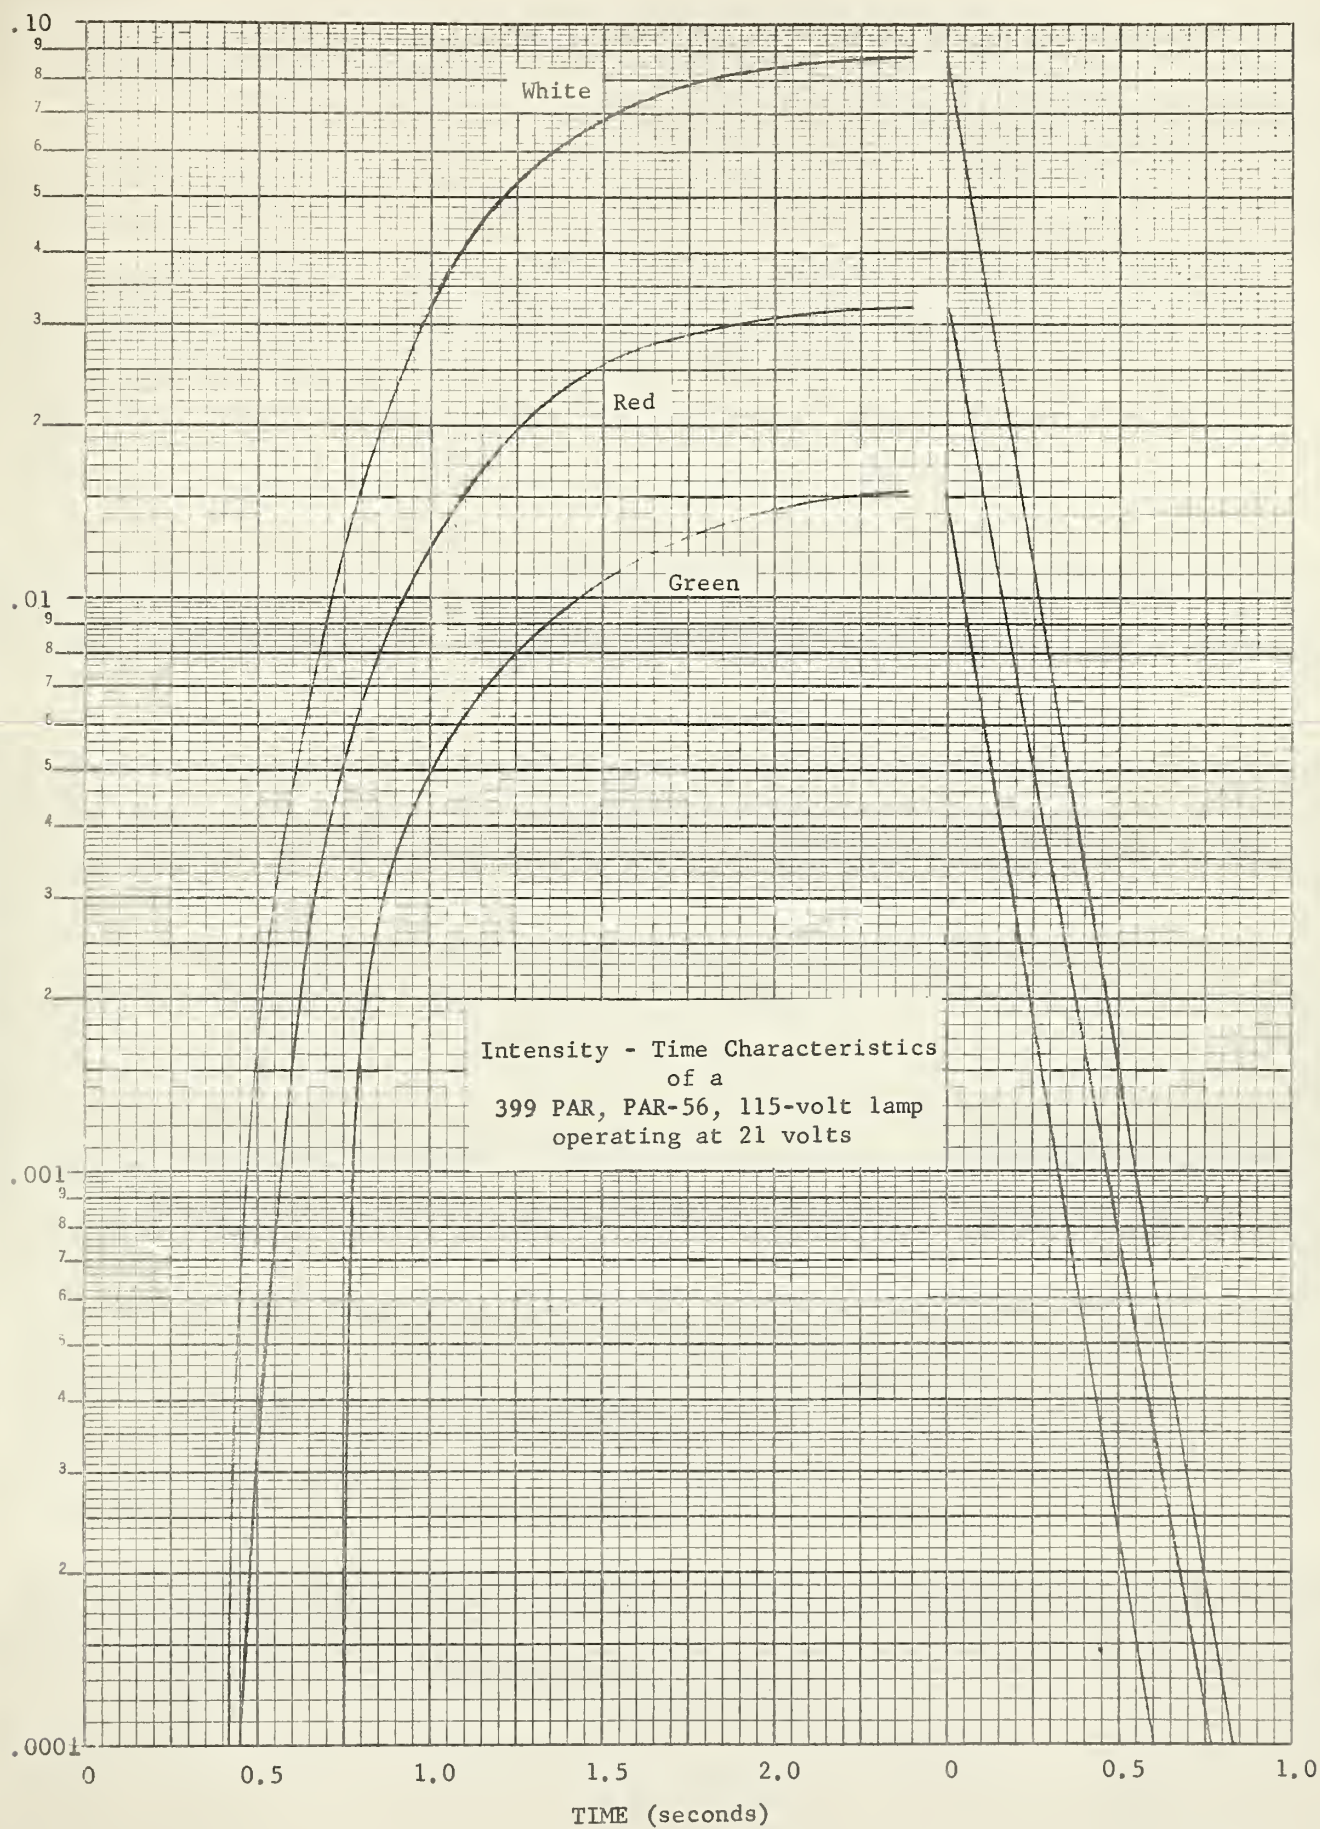


Figure 1





(Steady-burning intensity at 115 volts = 100)

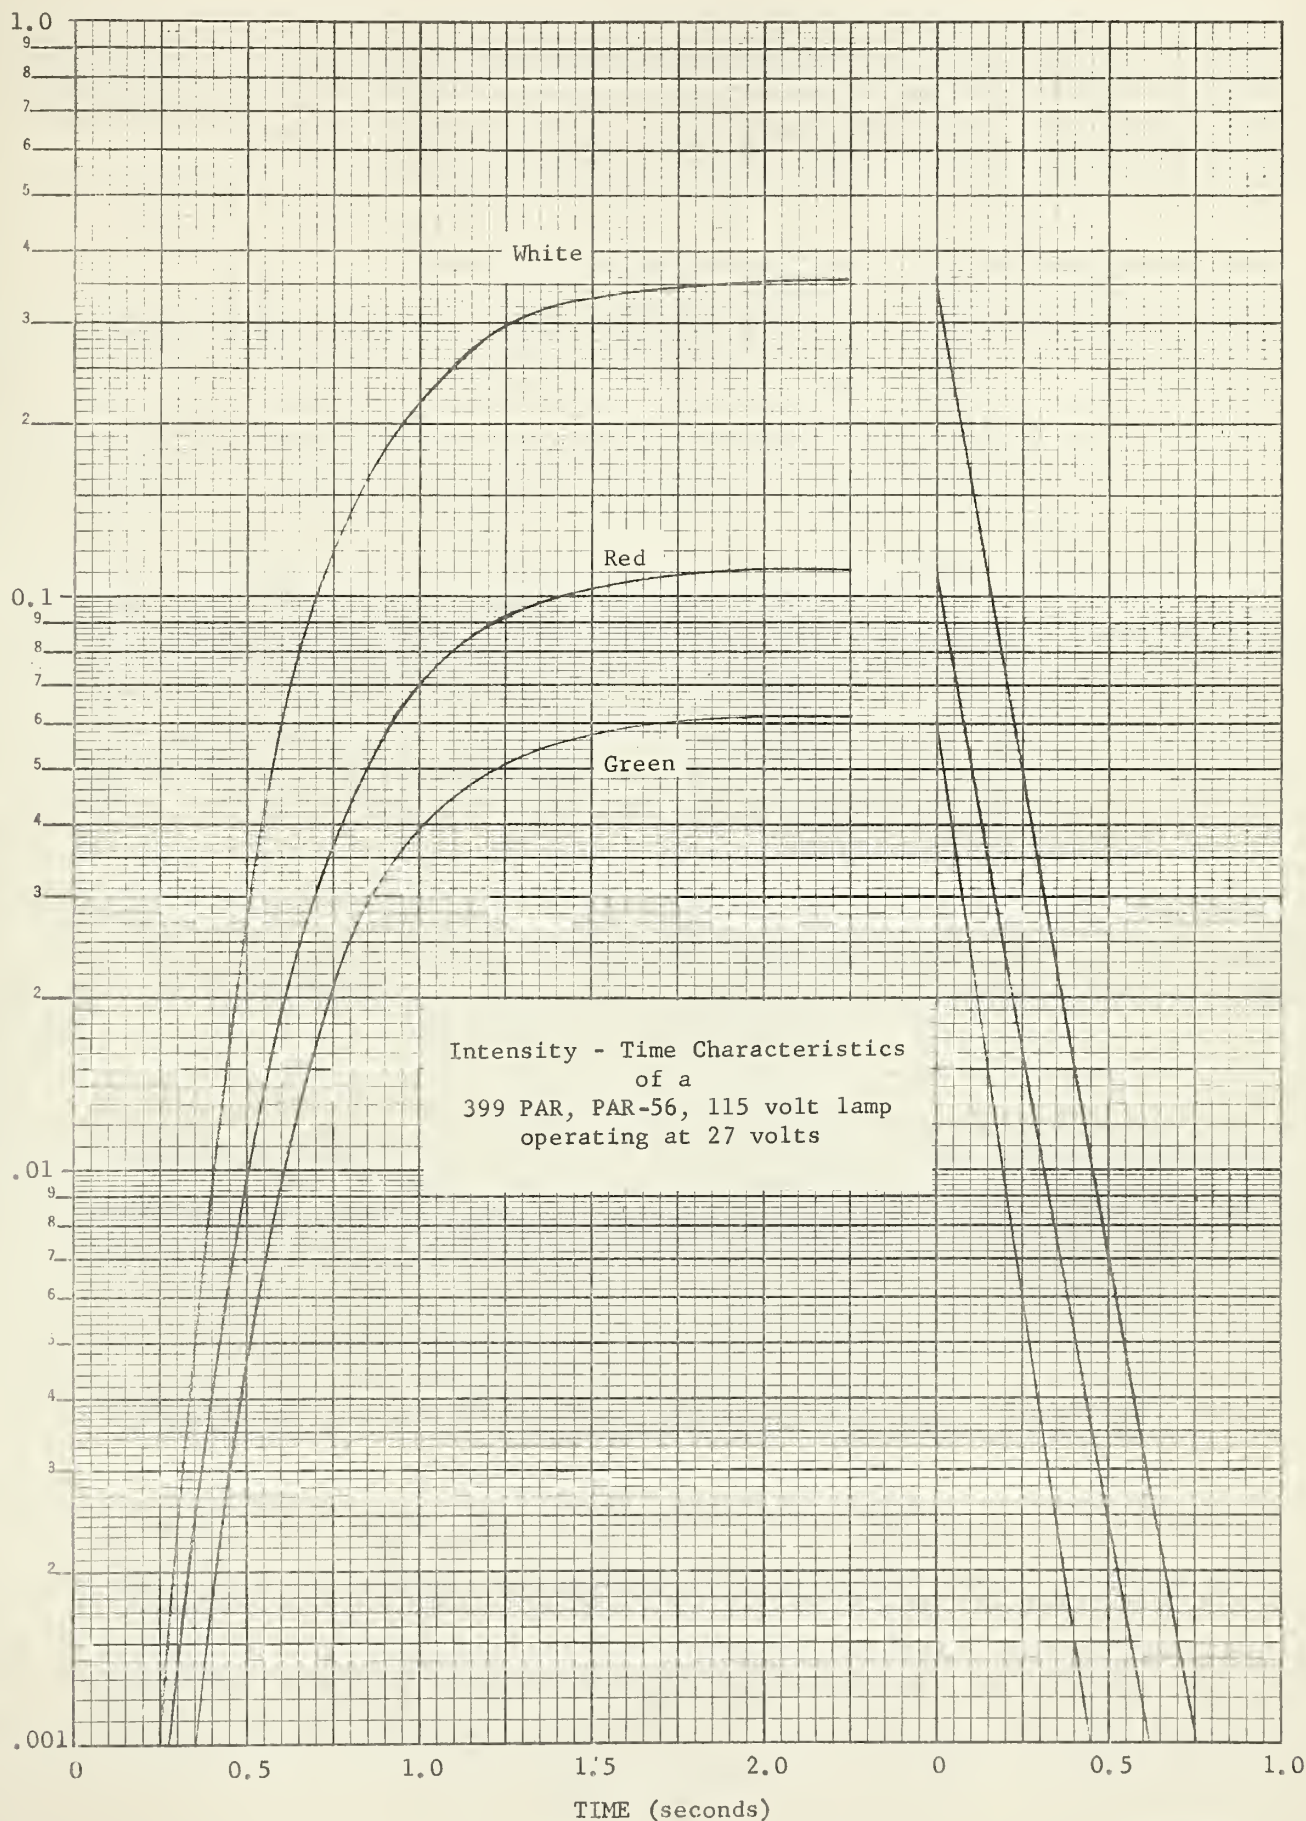


Figure 2





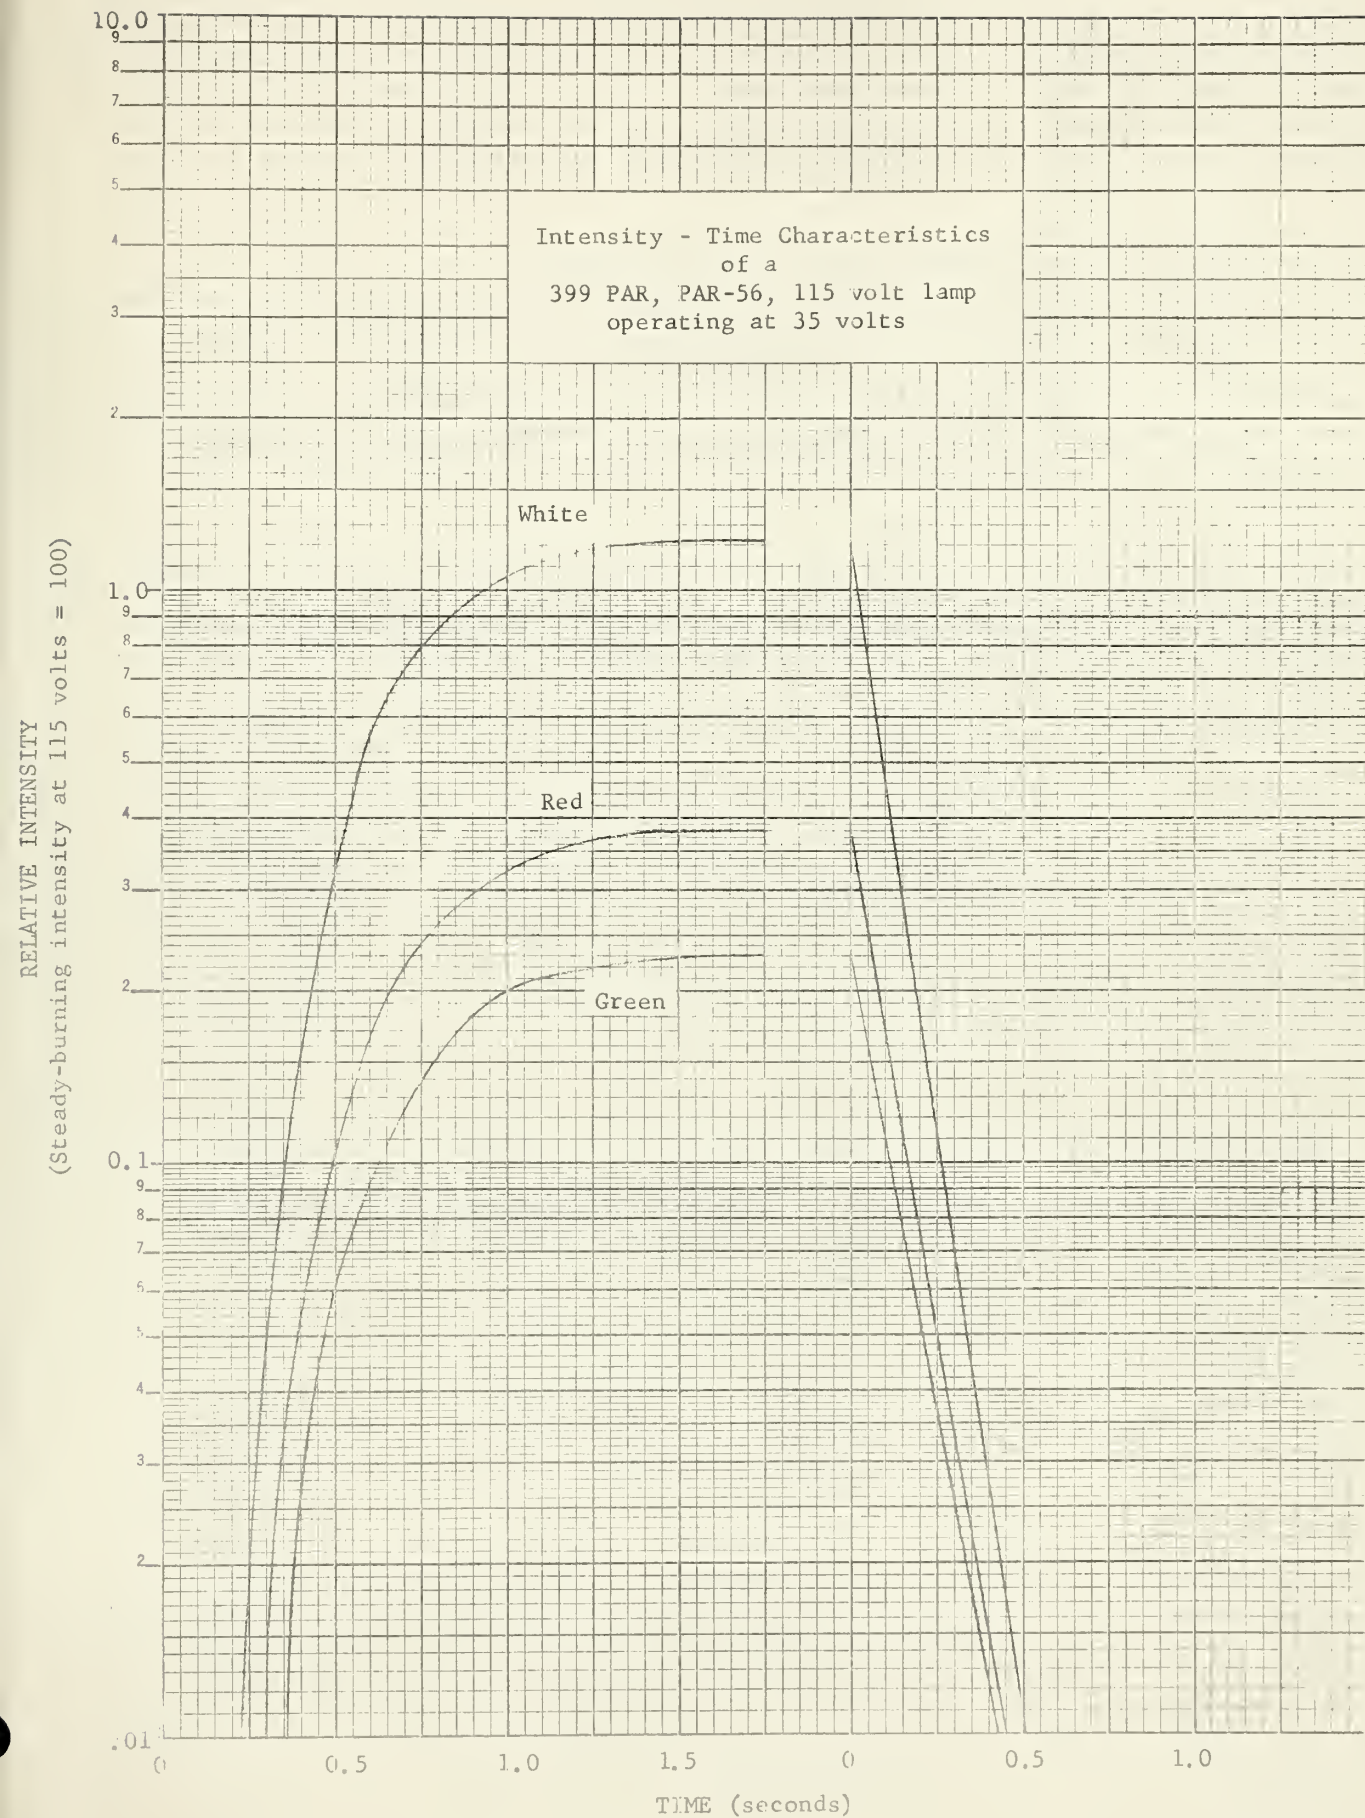


Figure 3



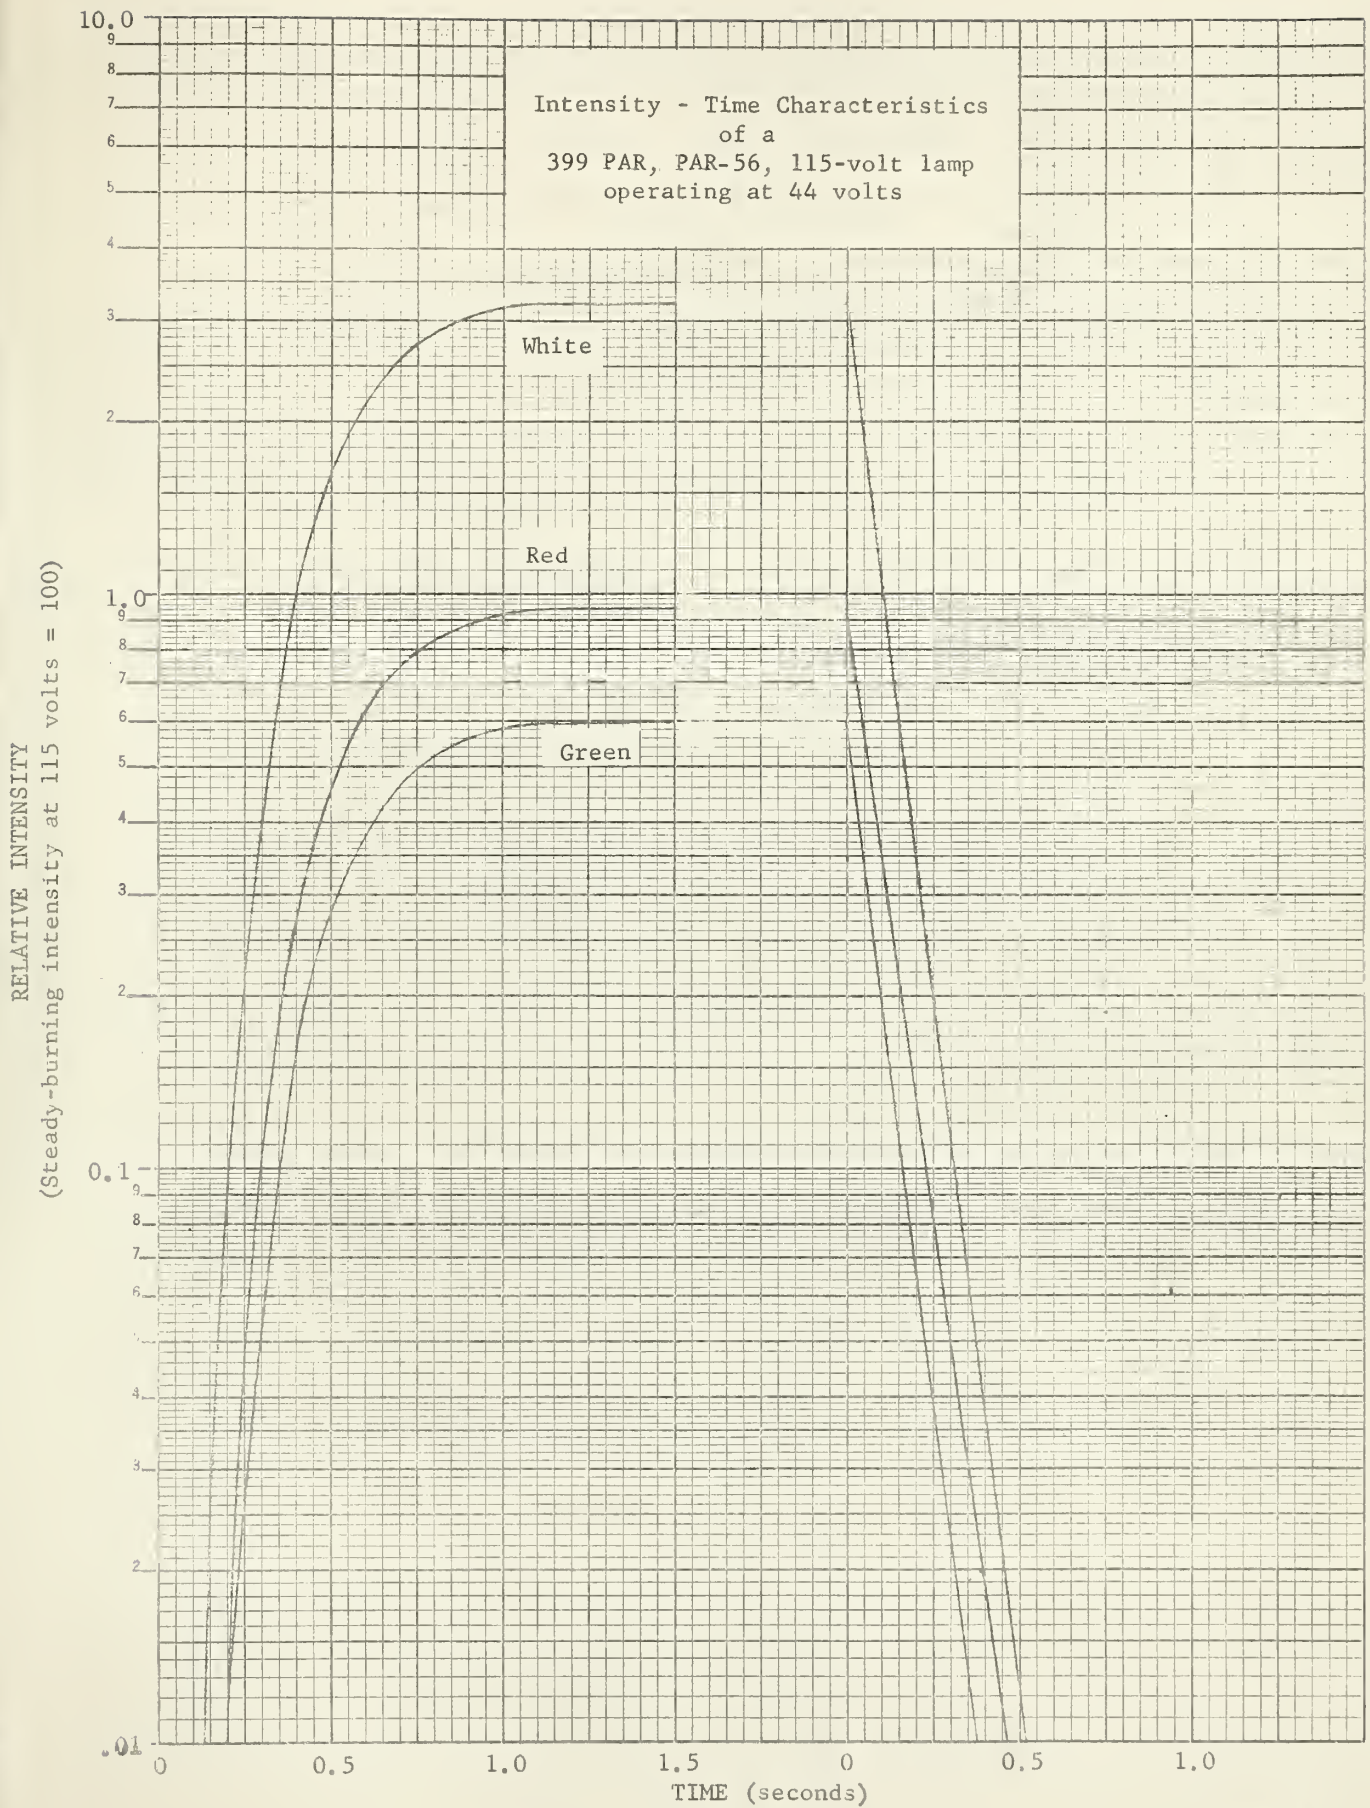


Figure 4





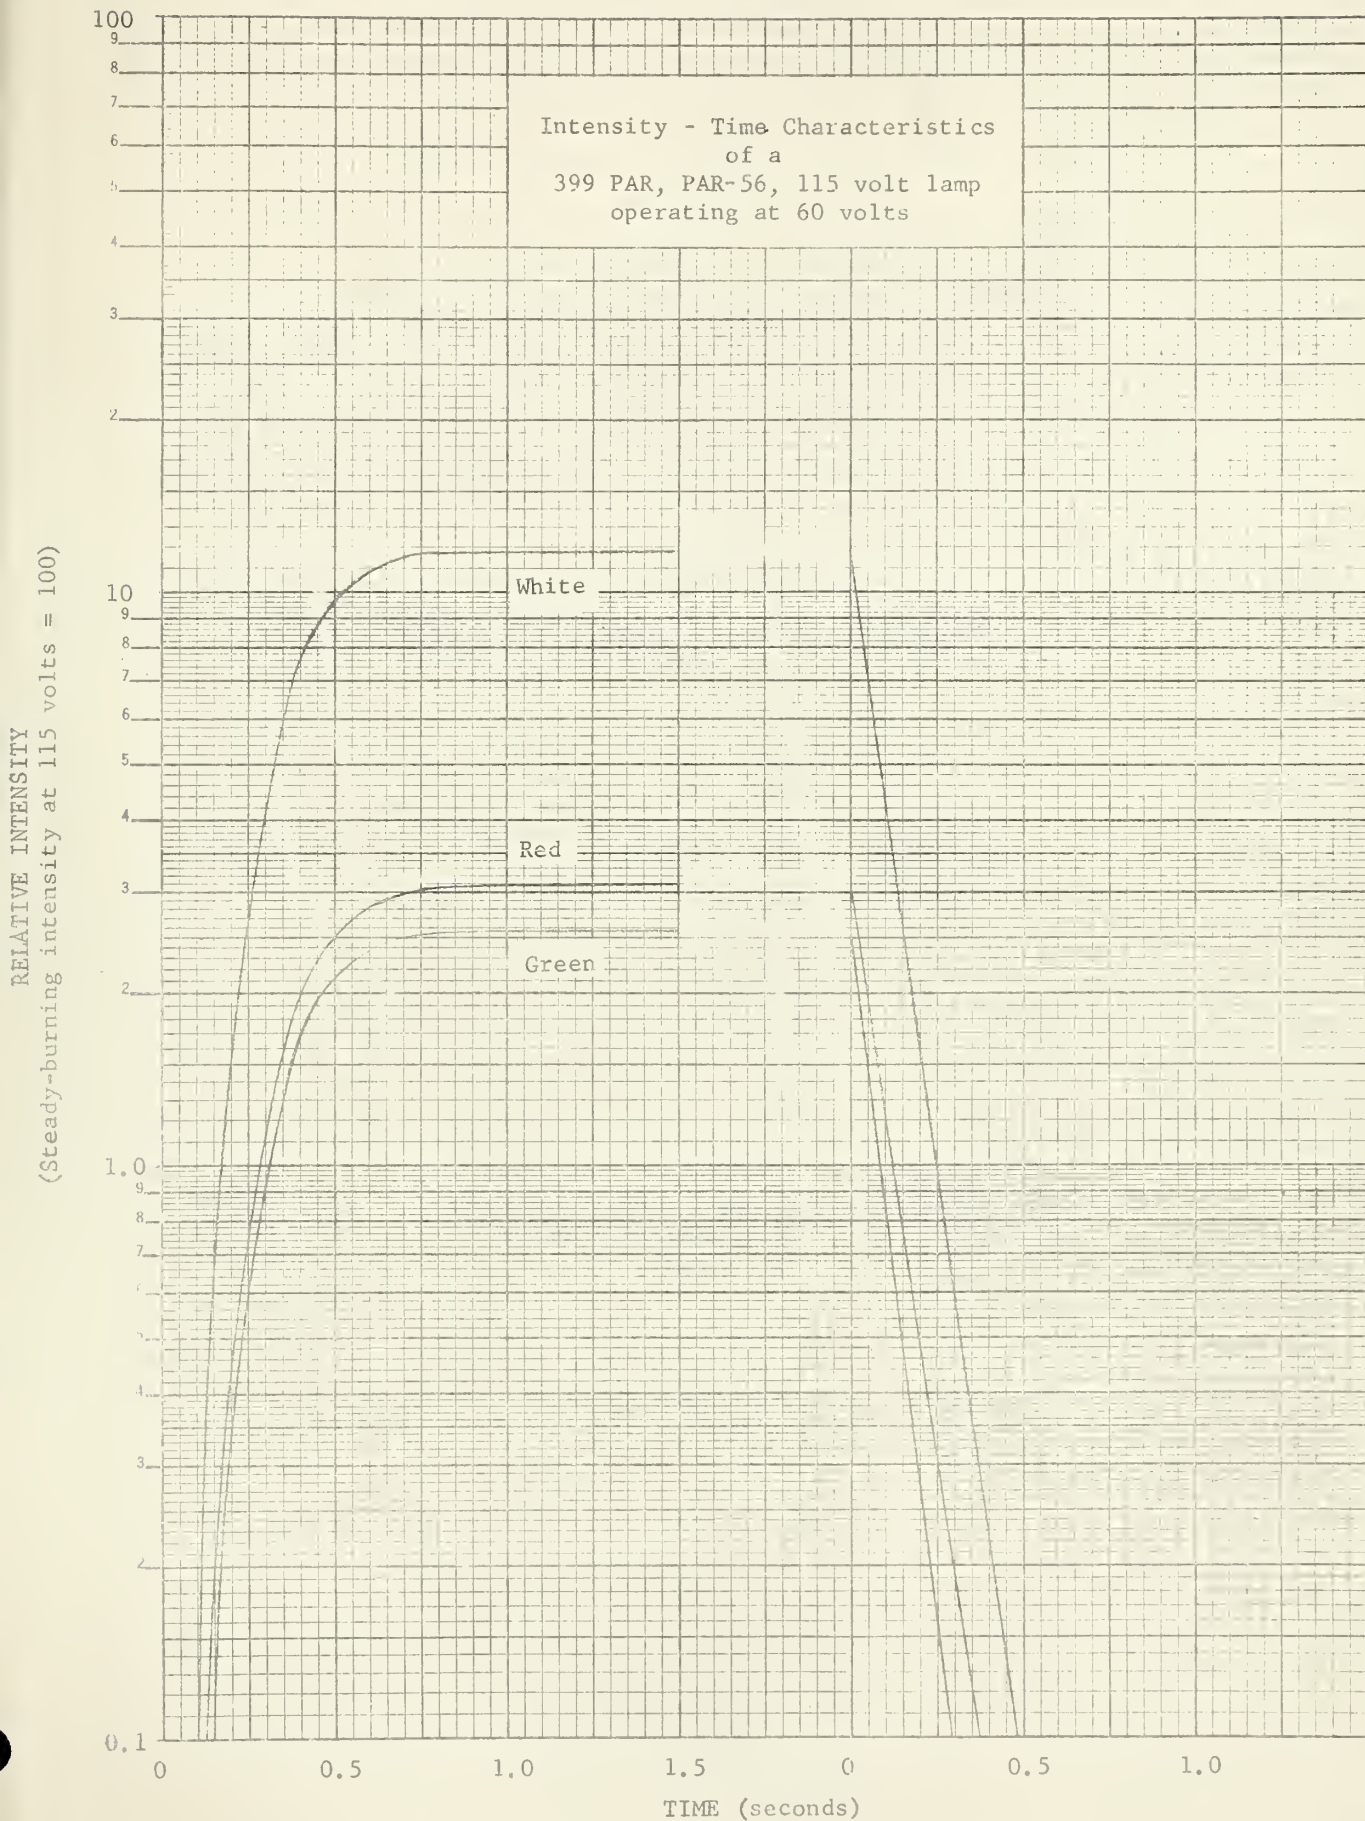


Figure 5



RELATIVE INTENSITY  
(Steady-burning intensity at 115 volts = 100)

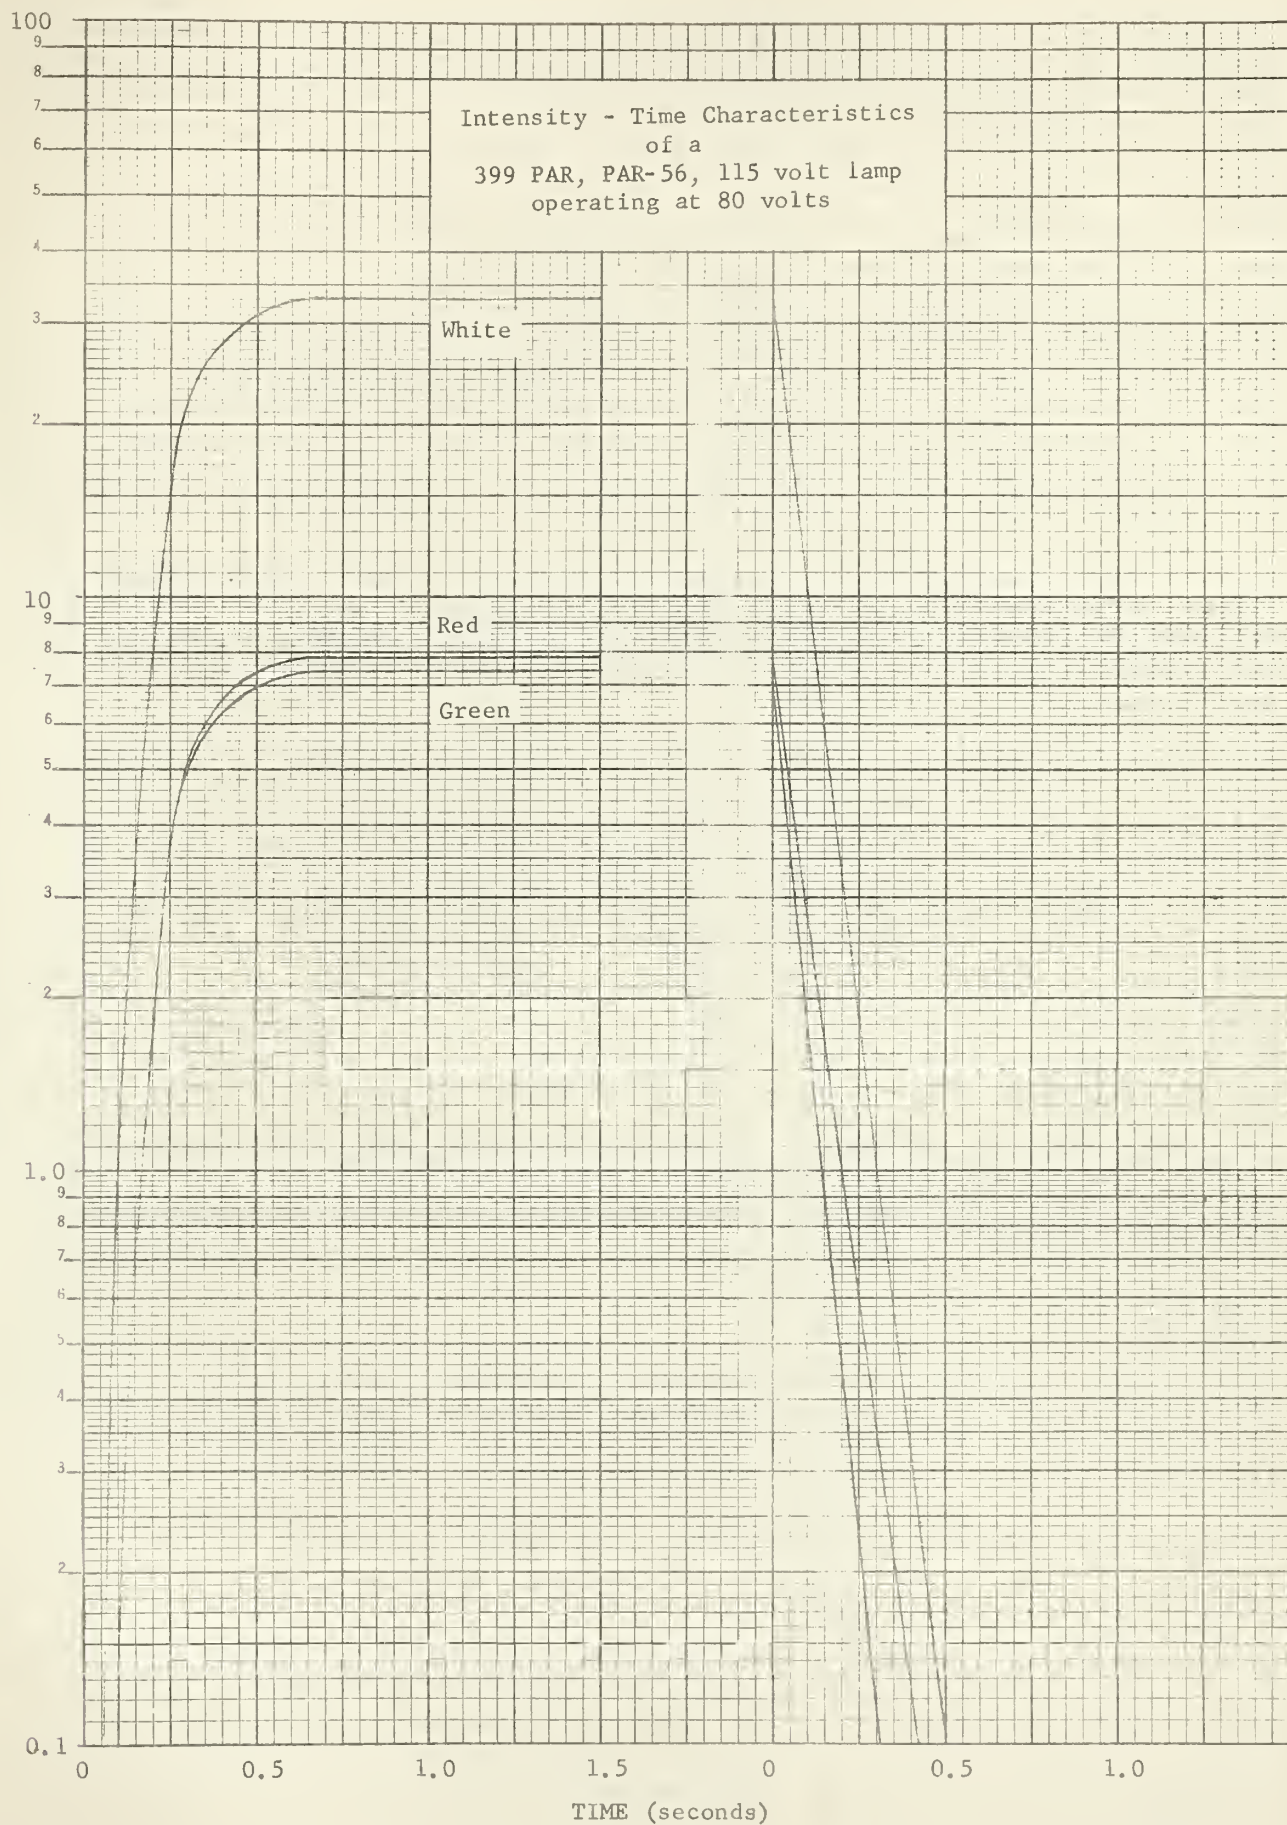


Figure 6





RELATIVE INTENSITY  
(Steady-burning intensity at 115 volts = 100)

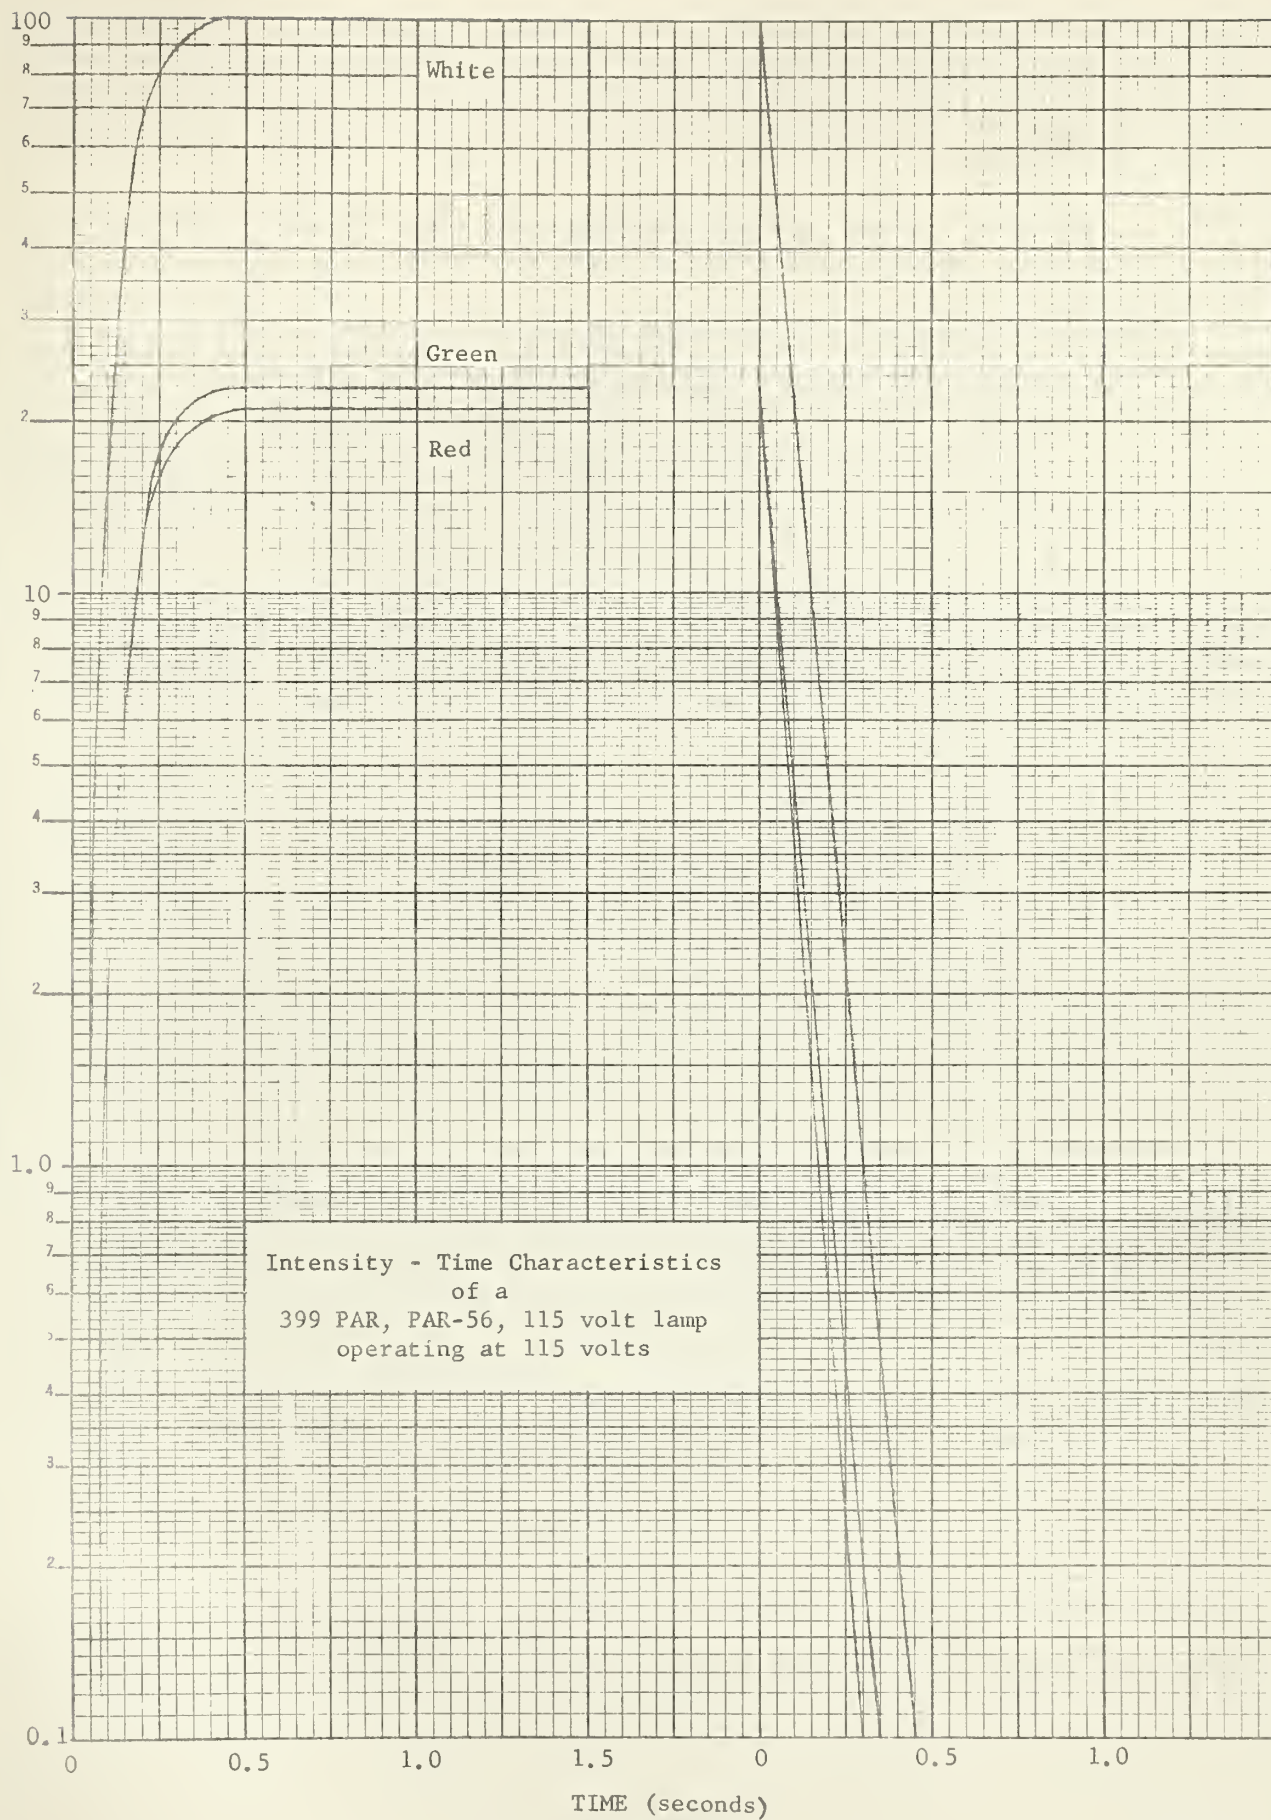


Figure 7



Intensity - Time Characteristics  
of a  
Flashing 399 PAR, PAR-56 lamp  
Method of Computing Effective Intensity

RELATIVE INTENSITY  
(Steady-burning intensity at 115 volts = 100)

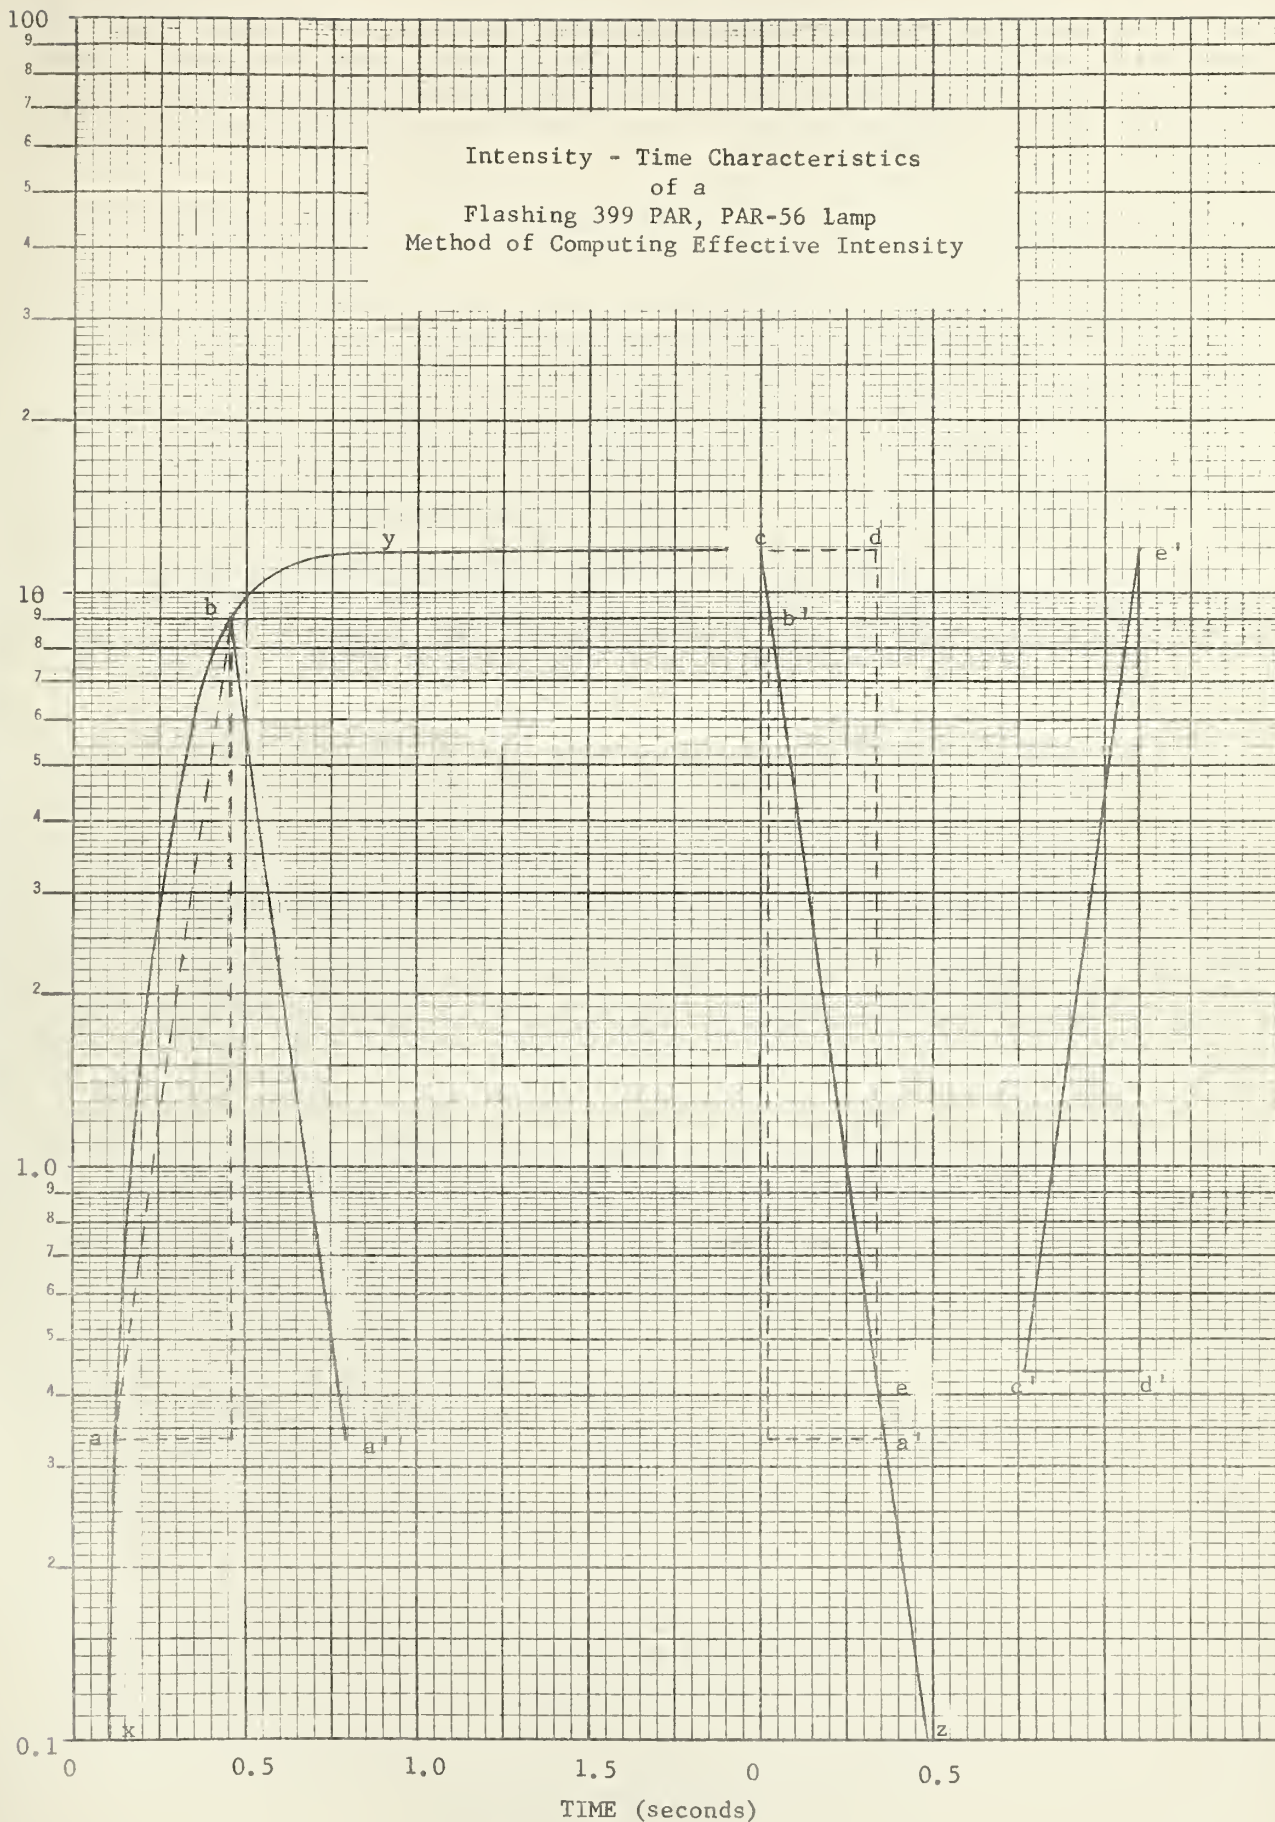


Figure 8





RELATIVE INTENSITY (Curve 1)  
RELATIVE EFFECTIVE INTENSITY (Curves 2 & 3)  
(Steady-burning intensity at 115 volts = 100)

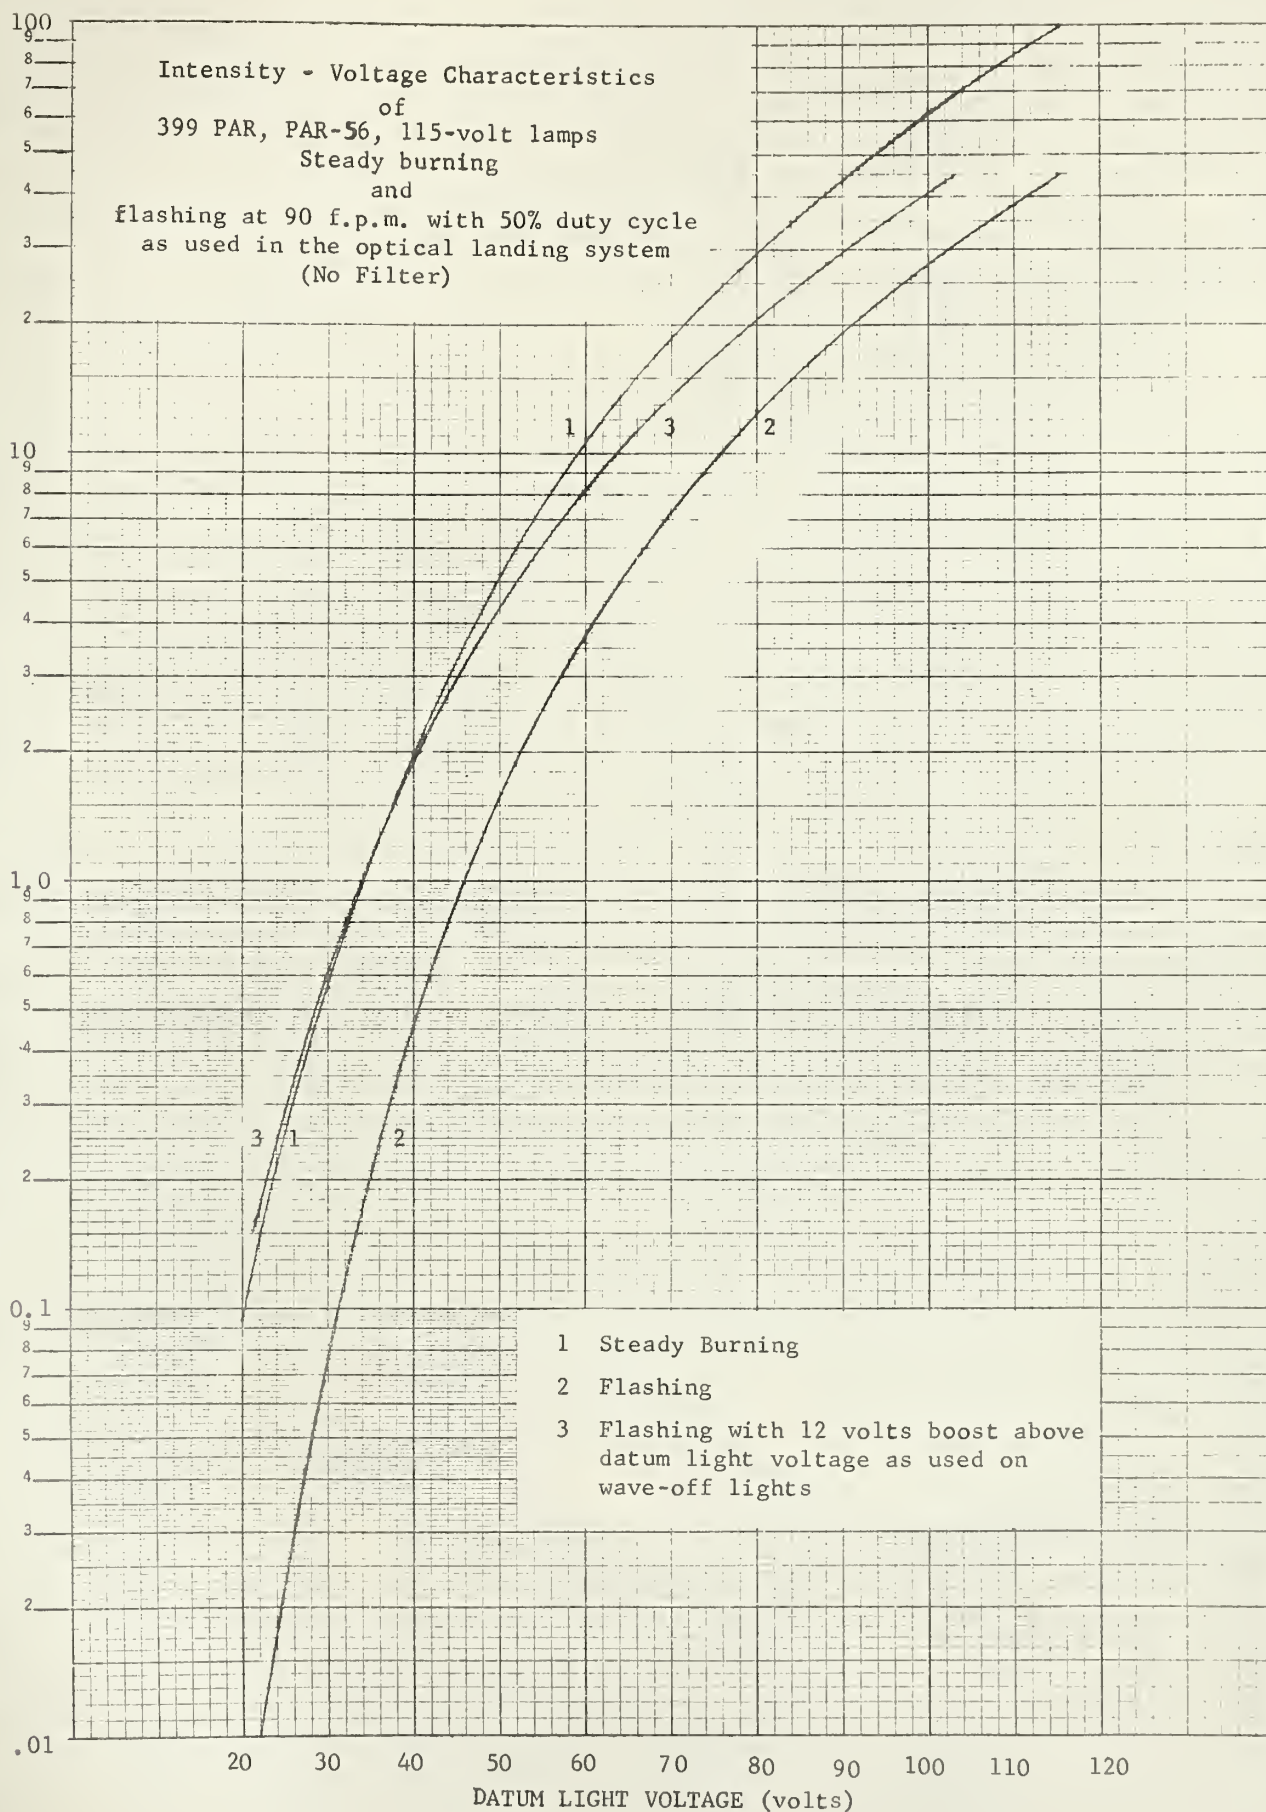


Figure 9

